


*Every quilt is unique!*

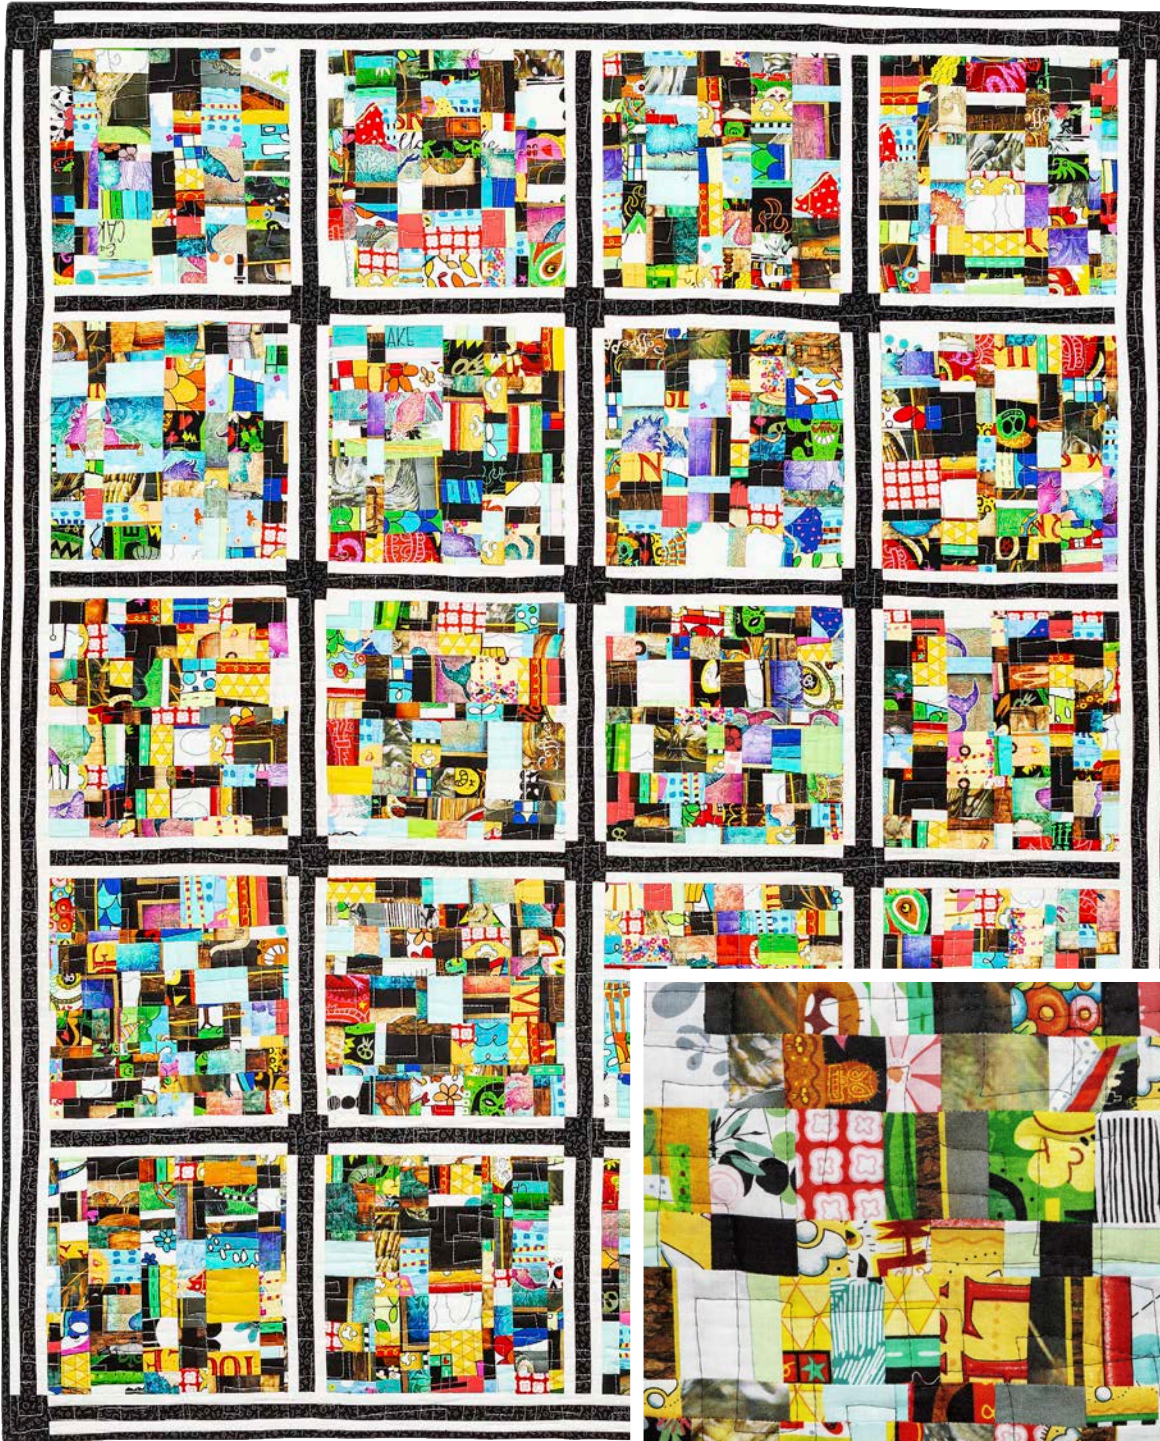


Designed by: Mike Flynn

Watch Mike's video on  YouTube


# Panel Plaid Quilt

FINISHED SIZE 48<sup>3</sup>/<sub>4</sub>" x 60<sup>1</sup>/<sub>2</sub>"  
FINISHED BLOCK SIZE 10" x 10"

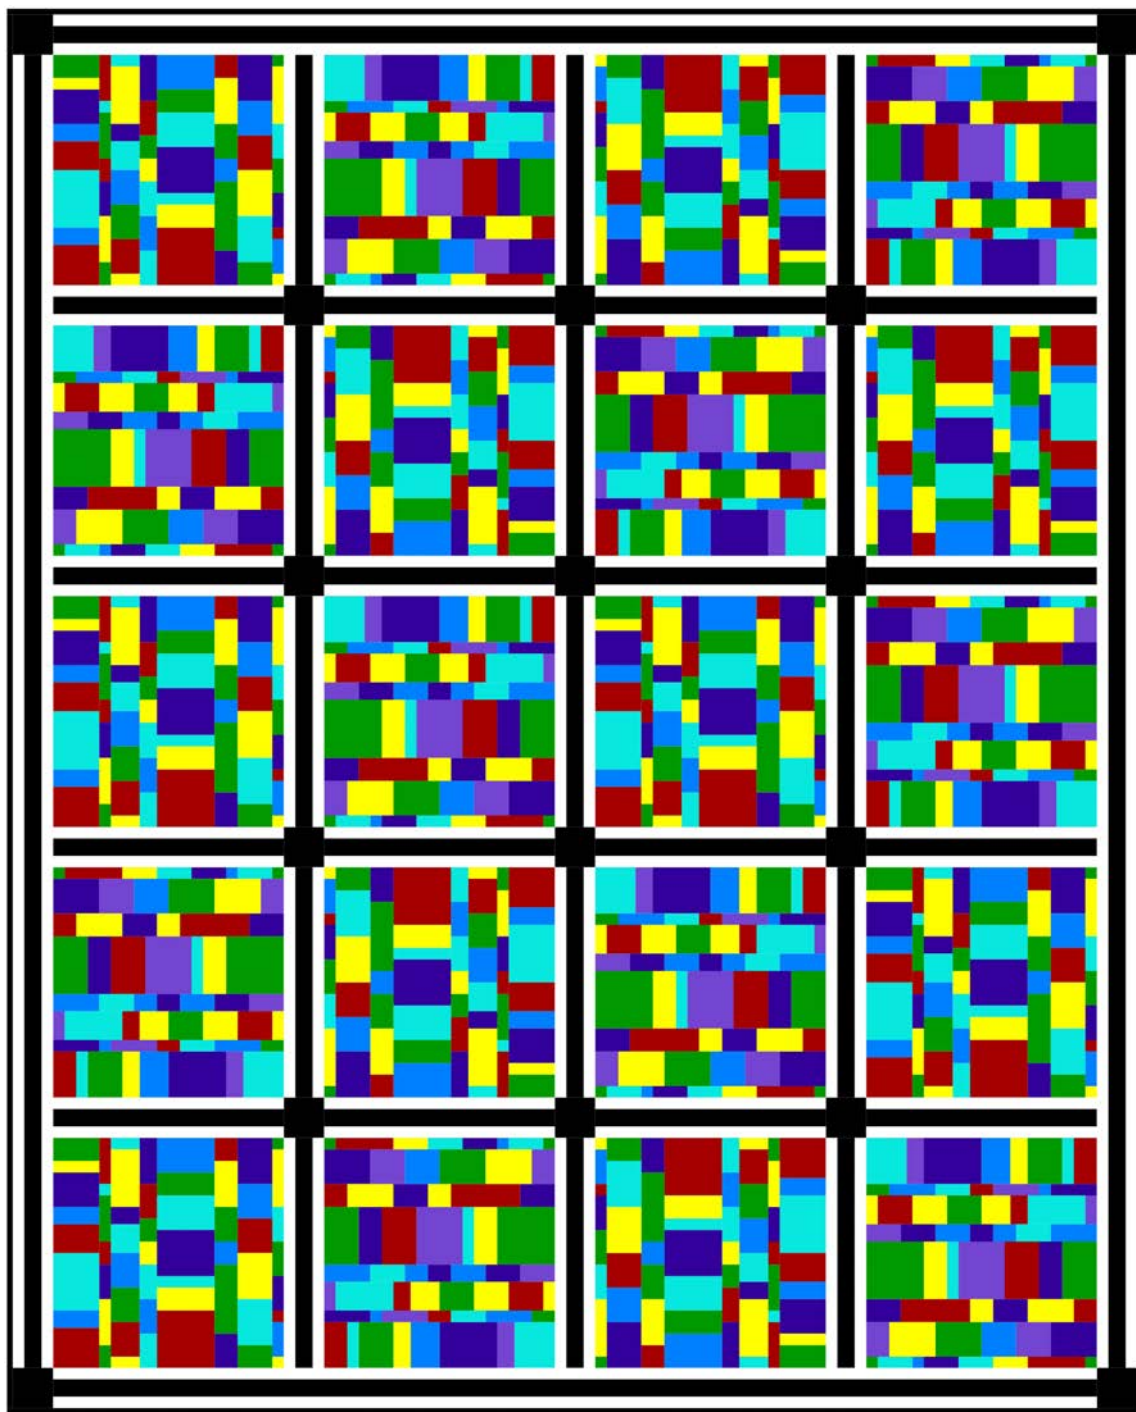

Designed by: Mike Flynn



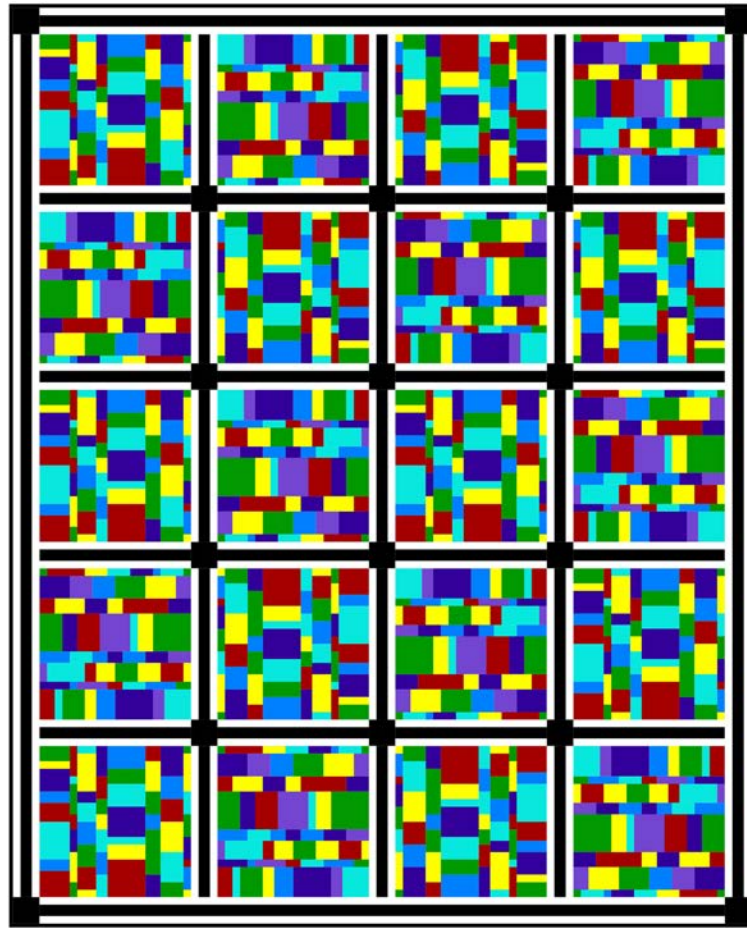

Finished Size: 48¾" x 60½"  
Finished Block Size: 10" x 10"


**FABRIC REQUIREMENTS**

	<b>Fabric A</b> panel, border stripe, print or basic ⅔ – 1 YARD* <b>1 BOLT</b>		<b>Fabric B</b> panel, border stripe, print or basic ⅔ – 1 YARD* <b>1 BOLT</b>		<b>Fabric C</b> panel, border stripe, print or basic ⅔ – 1 YARD* <b>1 BOLT</b>		<b>Fabric D</b> panel, border stripe, print or basic ⅔ – 1 YARD* <b>1 BOLT</b>
	<b>Fabric E</b> panel, border stripe, print or basic ⅔ – 1 YARD* <b>1 BOLT</b>		<b>Fabric F</b> panel, border stripe, print or basic ⅔ – 1 YARD* <b>1 BOLT</b>		<b>Fabric G</b> sashing and borders <b>1 YARD</b> <b>1 BOLT</b>		<b>Fabric H</b> sashing and borders, and binding <b>1¼ YARDS</b> <b>1 BOLT</b>
	<b>Suggested Backing</b> (option 1: non-directional) <b>3¾ YARDS</b> <b>3 BOLTS</b>		<b>Suggested Backing</b> (option 2: directional) <b>4 YARDS</b> <b>4 BOLTS</b>	* Fabrics A–F may include any of the following: ⅔ or 1 yard panel, 1 yard border stripe, 1 yard print or 1 yard basic.			

Information within gray box = Number of Bolts or Packs needed to make 12 Kits — note: based on 15 yard bolt




5. Cut (4)  $10\frac{1}{2}$ " x  $10\frac{1}{2}$ " blocks from each pieced section to make a total of 20 blocks.



Cut 20 Blocks


6. Stitch a  $1\frac{1}{4}$ " x WOF **Fabric H** strip lengthwise between (2) 1" x WOF **Fabric G** strips to make a  $2\frac{1}{4}$ " x WOF strip set. Press seams toward the center strip. Repeat to make 8 strip sets. Crosscut the strip sets into (31)  $10\frac{1}{2}$ " sashing units.



Cut 31 Sashing Units

## QUILT ASSEMBLY

Refer to the exploded quilt diagram as needed throughout the following steps.

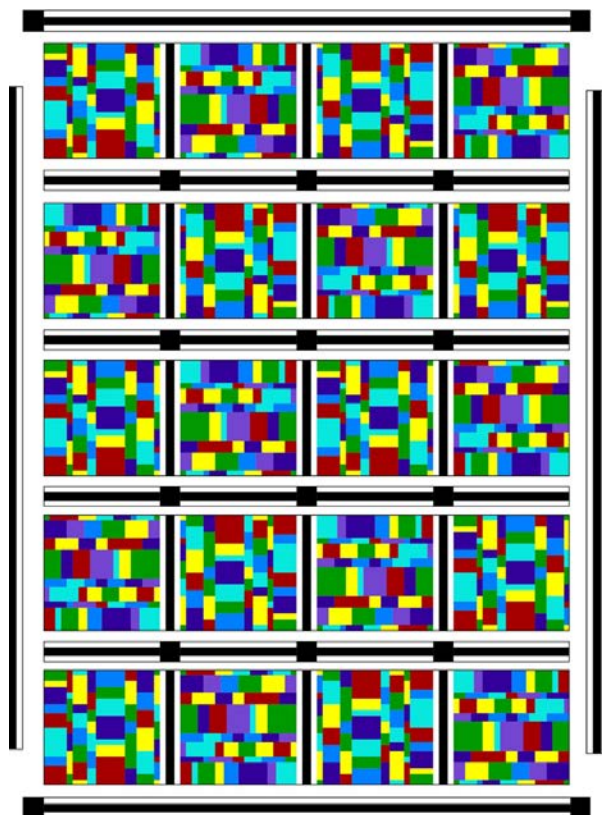

Exploded Quilt Diagram

1. Sew 4 blocks alternately together with 3 sashing units to make a  $10\frac{1}{2}$ " x  $45\frac{3}{4}$ " block row. Press seams toward the blocks. Repeat to make 5 rows.

2. Stitch 3 **Fabric H**  $2\frac{1}{4}$ " squares alternately together with 4 sashing units to make a  $2\frac{1}{4}$ " x  $45\frac{3}{4}$ " sashing row. Press seams toward the squares. Repeat to make 4 sashing rows.

3. Sew the block rows alternately together with the sashing rows to complete the  $45\frac{3}{4}$ " x  $57\frac{1}{2}$ " quilt center. Press seams toward the sashing rows.

4. Stitch the **Fabric H**  $1\frac{1}{4}$ " x WOF border strips short ends together to make a long strip. Press seams to 1 side. Cut into 2 strips each  $57\frac{1}{2}$ " and  $45\frac{3}{4}$ ". Repeat with the **Fabric G** 1" x WOF border strips, cutting 4 strips each  $57\frac{1}{2}$ " and  $45\frac{3}{4}$ ".

5. Sew a **Fabric H**  $57\frac{1}{2}$ " strip lengthwise between 2 **Fabric G**  $57\frac{1}{2}$ " strips to make a  $2\frac{1}{4}$ " x  $57\frac{1}{2}$ " side strip. Press seams toward the center strip. Repeat to make a second side strip. Repeat with  $45\frac{3}{4}$ " strips to make (2)  $2\frac{1}{4}$ " x  $45\frac{3}{4}$ " top/bottom strips.

6. Stitch the side strips to the long sides of the quilt center. Press seams toward the strips. Sew a **Fabric H**  $2\frac{1}{4}$ " square to each end of the top/bottom strips. Press seams toward the strips. Stitch the strips to the top and bottom to complete the top. Press seams toward the strips.

## FINISHING

1. Remove the selvage edges from the backing pieces. Join on the long edges with a  $\frac{1}{2}$ " seam allowance. Press seam open. Trim to make the 56" x 68" backing piece.
2. Layer the backing, a 56" x 68" batting piece and the top. Pin or baste to hold.
3. Quilt as desired. Trim batting and backing even with the top.
4. Make double-fold binding using the **Fabric H** binding strips. Bind the edges of the quilt using your preferred method to complete the quilt.